


H4 HALOGEN HIGH/LOW BEAM



1027

Headlamp Assembly
Mounting frame & adjusting mechanisms.
Simple fourpoint mounting.
Voltage: Halogen 12V & 24V

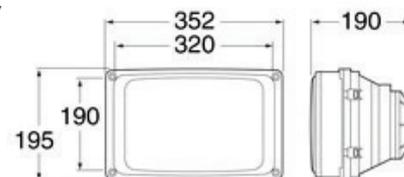

1042

165 x 100mm Insert, Semi-sealed headlamp with sealing boot and wiring adaptor.
Voltage & Headlamp: 12V - XD1260/55, 24V - XD2475/70

HALOGEN INSERTS



1040 - 1053 H1 - 146mm Long Range Driving Insert

Semi-sealed headlamp, for high beam section of dual headlamp. Voltage & Headlamp: 12V - C1255, 24V - C2470



1058

H4 -178mm High/Low Beam
Semi-sealed headlamp with front position lamp.
Voltage & Headlamp: 12V - XD1260/55,
24V - XD2475/70 Front Position: HL124, HL244


CLOSE RANGE HALOGEN WORK LAMPS



1533 - 1533HAN
plug.

Free form reflector external wiring.
DT version with 2 pin Deutsch rear

Upright side or 90° pendant swivel.
1533HAN available with handle
Voltage, Power Consumption:
12V - 55W, 24V - 70W

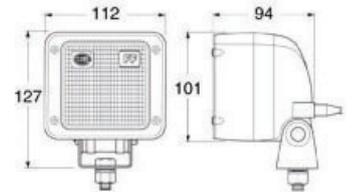


1539LED
performance

Mega Beam - Features 4 high

white LEDs. Impact resistant housing.

Voltage: Multivolt™ - 9V to 33V.
Power Consumption: 15W



STROBE & REVOLVING LAMPS



1657

Firebolt Plus Strobe Lamp

Modular construction incorporates a powerful replaceable flash tube and vibration resistant circuit board.

Polycarbonate lens and base.


Current draw: 0.25 - 0.04 Amps

Voltage: 12-72V DC.

Voltage tolerance +/- 10%.

Flash Rate: 60 +/- 10 per minute.

Supplied with mounting base c/w hardware. Bulb to suit: XN000 Flash tube (inc)



1732 -1732-24V

Rotoflex Revolving Lamp

Polycarbonate lens, flexible rubber base.


Current draw: 12V 5.5 Amps 24V 3.5 Amps

Wattage: 12V 55W 24V 70W

Rotation: 160 +/- 30 rpm.

Mounting: Fixed base or magnetic attachment

Bulbs to suit: 1730 12V (C1255), 1731 24V (2470)




LED NUMBER PLATE LAMP



2559

Pre-wired with 0.5m of cable.


Voltage: LED Multivolt (10-33 volts).




MARKER & INDICATOR LAMPS



2027 - 2058 Red/Amber Side Marker Lamp.
 Ultra high impact resistant.
 Voltage: Suitable for 12V & 24V system|
 Pre-wired with 500mm of cable.
 Bulk pack pre-wired with 2.5m of cable.




2057 LED Flush Mount Cab Marker Lamp
 Amber, optic appears clear until illuminated
 Voltage: Suitable for 12V & 24V system
 Pre-wired with 500mm of cable.
 Bulk pack pre-wired with 2.5m of cable.




Lamps pre-wired with 0.5m of cable.
 Voltage: LED Multivolt 8V - 28V.

2026 Amber Cab Marker
 2051 Amber Trailer Front End Outline
 2053 Red/Amber Side Marker
 2054 White Front Position/End Outline
 2307 Red Rear Position/End Outline



Insulated earth.
 2 hole surface mount.
 Pre-wired with 2.5m of cable.
 Voltage: LED Multivolt (9V - 33V)

2151 DuraLed Rear Indicator Lamp
 Available 2151-HCS ISO 13207 compatible
 2330 DuraLed Rear Position/Stop Lamp
 2331 DuraLed Rear Position/Stop Lamp



MARKER & INDICATOR LAMPS




2151H

2330H

Insulated earth.
2 hole surface mount.
Pre-wired with 2.5m of cable.
Voltage: LED Multivolt (9V - 33V)


DuraLed Rear Indicator Lamp
Available 2151-HCS ISO 13207 compatible
DuraLed Rear Position/Stop Lamp



2379

Position/Stop/Indicator LED Combination Lamp
Featuring extra wide-angle side visibility.
Transient spike circuit protection,
horizontal mount.
Pre-wired with 6m of cable.
Voltage: LED Multivolt (8-28volts).

Available as 2379-Cs ISO 13207-1 compatible.

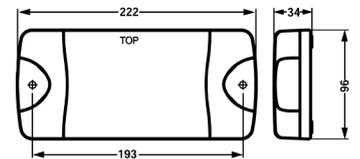

2379TP

DuraLed Multivolt™ LED Lighting Trailer Conversion Kit
2x Combination stop/rear direction indicator lamps
with 6m cable.
2x Red retro reflector,
LED number plate lamp & 7 pole flat plug.



2130

2390

LED 83mm rear direction indicator lamp.
Mounting: Single bolt 1/4" Stainless UNC thread.
Nut and washer supplied.
Voltage: Multivolt™ for optimum brightness
at input voltages from 9V to 33V.

Rear Direction Indicator Lamp
Stop/Rear Position Lamp

