




# Trailer Axle

## Steel Wheels




TRT Part No	Wheel Size	Offset	Bore	Stud	PCD
176056	17.5x6.00"	133mm	176mm	10 ISO	225mm
176766	17.5x6.75"	145mm	176mm	10 ISO	275mm
197577	19.5x7.50"	151mm	221mm	10 ISO	275mm
228313	22.5x8.25"	165mm	281mm	10 ISO	335mm
228283	22.5x8.25"	165mm	281mm	10 ENG	335mm

### Double Cap & English Stud Hole

### ISO Stud Hole

### Tubeless Wheel



#### Countersunk Hole

US / Jap DCN	Hole ID 32.2- 37mm	18° Taper
DIN DCN	Hole ID 27- 32 mm	18° Taper
English	Hole ID 25.4- 31.5mm	40° Taper


No Countersink ( Square )  
ISO Hole ID 26mm




**English Wheel Nut**  
80° Cone 7/8 BSF 11 TPI Thread  
1-1/4" AF Across Flats (32mm)  
Also comes as flat nut for back up



**ISO Flange Head Wheel Nut**  
Swivel Flange Face  
M22 x 1.5 thread  
33mm AF - 31mm High



#### Wheel Stud Back Nut Style

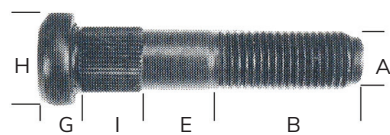

#### Wheel Stud Head Style

#### Stud Dimensions

A	Thread Diameter
B	Thread Length
C	Thread Diameter
D	Thread Length
E	Shoulder Length Diameter
F	Flange Length Diameter
	Slotted for pin?
G	Shoulder Length
H	Head Diameter
	Length Round Clipped
I	Knurled Length Diameter

## Alloy Wheels



TRT Part No	Rim Size	Offset	Stud	PCD
AGR370	17.5 x 6.00	133	10 ST 26mm	225mm
AGR365	17.5 x 6.75	141	10 ST 26mm	225mm
AGR364	19.5 x 7.50	155	8 ST 26mm	275mm
AGR362	22.5 x 8.25	168	10 ST 26mm	335mm
AGR388	22.5 x 8.25	168	10 ST 32mm	335mm



**Dual Sleeved Nut 32mm**  
0526054141

...for the long haul